



# MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products  
 NY Mailing Address: PO Box 410, Smithtown, NY 11787  
 350 Rabro Drive 2101 W. Crescent Ave., Suite D  
 Hauppauge, NY 11788 Anaheim, CA 92801  
 631/348-0282 714/535-2727  
 FAX 631/348-0279 FAX 714/535-5738  
 Info@Mason-Ind.com Info@MasonAnaheim.com


## CERTIFIED FOR

JOB NAME :  
 CUSTOMER :  
 CUSTOMER P.O. :  
 MASON M.I. :  
 DWG. NO. :

## TYPE

# HS

1" Deflection  
 X & A Spring  
 Series Hangers

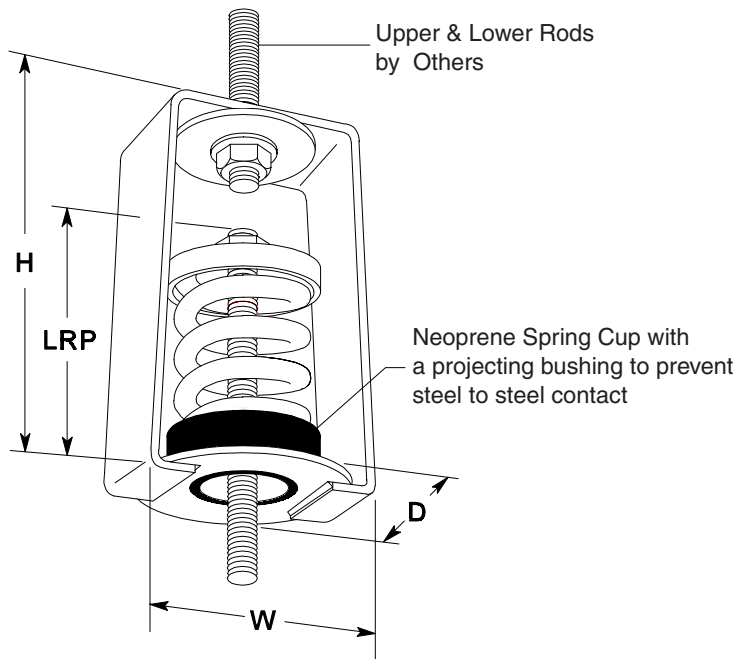

## TYPE HS RATINGS

Size	Rated Capacity [lbs]	Rated Defl. [in]	Spring Constant [lbs/in]	Spring Color
HS-X-23	23	1.30	18	Brown
HS-X-33	33	1.10	30	Red
HS-X-54	54	1.20	45	White
HS-X-76	76	1.02	73	Black
HS-X-113	113	1.00	113	Yellow
HS-X-130	130	1.00	130	Purple
HS-X-175	175	1.00	175	Silver
HS-X-210	210	1.00	210	Blue
HS-A-12	12	1.00	12	Red
HS-A-18	18	1.00	18	Gray
HS-A-25	25	1.00	25	Orange
HS-A-41	41	1.18	35	Pink
HS-A-56	56	1.14	49	Black
HS-A-73	73	1.06	69	Tan
HS-A-95	95	1.01	94	Green
HS-A-45	45	1.60	28	Blue
HS-A-75	75	1.50	50	Orange
HS-A-125	125	1.33	94	Brown
HS-A-200	200	1.15	174	Black
HS-A-310	310	1.00	310	Yellow
HS-A-400	400	1.00	400	Green
HS-A-510	510	1.00	510	Red
HS-A-625	625	1.00	625	White

## TYPE HS DIMENSIONS (inches)

Size Range	D	H	W	LRP	MRD
HS-X-23-210	2 1/2	4 1/4	2 7/8	3 1/2	3/8
HS-A-12-25	2 3/4	5 3/4	3 1/4	3 1/2	5/8
HS-A-41-95	2 3/4	5 3/4	3 1/4	4	5/8
HS-A-45-125	2 3/4	5 3/4	3 1/4	4	5/8
HS-A-200-625	2 3/4	5 3/4	3 1/4	4	5/8

LRP - Lower Rod Penetration  
 MRD - Maximum Rod Diameter

All springs have additional travel to solid equal to 50% of Rated Deflection.

## CERTIFICATION DATA

TAG : \_\_\_\_\_

UNIT : \_\_\_\_\_

PLAN VIEW OF HANGER LOCATION :



## \_\_\_\_\_ inch SPECIFIED DEFLECTION

1 :	6 :
2 :	7 :
3 :	8 :
4 :	9 :
5 :	10 :

Material for One Set : \_\_\_\_\_ Sets Required

DWN : \_\_\_\_\_ CHKD : \_\_\_\_\_ DATE : \_\_\_\_\_

DWG NO. : \_\_\_\_\_