



**MASON INDUSTRIES, Inc.**  
Manufacturers of Vibration Control Products

350 Rabro Drive 2101 W. Crescent Ave., Suite D  
Hauppauge, NY 11788 Anaheim, CA 92801  
631/348-0282 714/535-2727  
FAX 631/348-0279 FAX 714/535-5738  
Info@Mason-Ind.com Info@MasonAnaheim.com  
Website: www.Mason-Ind.com

CERTIFIED FOR \_\_\_\_\_

JOB NAME \_\_\_\_\_

CUSTOMER \_\_\_\_\_

CUSTOMER P.O. \_\_\_\_\_

MASON M.I. \_\_\_\_\_

DWG No. \_\_\_\_\_

TYPE

**ML**

NEOPRENE  
LEVELING AND  
SHOCK MOUNTS

CADMIUM PLATED  
LEVELING BOLT  
is easy to turn

LOCKING NUT secures mount to  
machine after leveling. Use  
washers over oversized holes.


BRIGHT SAFETY  
YELLOW STEEL  
HOUSING

HOUSING  
DIAMETER


HEIGHT  
may be  
increased  
5/8" (16mm)  
by turning  
Leveling  
Bolt

NON-SKID  
NEOPRENE  
CUSHION


BRAKES  
AND  
SHEARS




INJECTION  
MOLDING  
MACHINES




CUT OFF  
MACHINES




IRON WORKERS



UNADJUSTED



ADJUSTED



LATHES


**TYPE ML DIMENSIONS and LOAD RATINGS**

Type & Size	Capacity Range (lbs)	Capacity Range (kgs)	Steel Top Diameter (in)	Steel Top Diameter (mm)	Height (in)	Height (mm)	Leveling Bolt	Bolt Length (in)	Bolt Length (mm)
ML-3	100-500	46-226	3 1/2	90	1 1/8	28	1/2"-13	3 1/2	90
ML-5	500-1000	226-453	5	125	1 3/4	45	1/2"-13	5	125
ML-6	1000-4000	453-1814	6 1/4	160	1 3/4	45	3/4"-10	5	125
ML-8	4000-12000	1814-5443	8	200	2	50	1"-8	8	200

**CERTIFICATION DATA**

TAG \_\_\_\_\_

UNIT \_\_\_\_\_

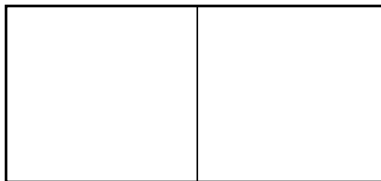

PLAN VIEW OF MOUNT LOCATION

1	2
3	4
5	6
7	8
8	10

MATERIAL FOR ONE SET \_\_\_\_\_ SETS REQUIRED

DWN	CHKD	DATE
-----	------	------

DWG No. \_\_\_\_\_