




**MASON INDUSTRIES, Inc.**  
Manufacturers of Vibration Control Products

350 Rabro Drive 2101 W. Crescent Ave., Suite D  
Hauppauge, NY 11788 Anaheim, CA 92801  
631/348-0282 714/535-2727  
FAX 631/348-0279 FAX 714/535-5738  
Info@Mason-Ind.com Info@MasonAnaheim.com  
www.Mason-Ind.com www.MasonAnaheim.com

CERTIFIED FOR \_\_\_\_\_  
JOB NAME \_\_\_\_\_  
CUSTOMER \_\_\_\_\_  
CUSTOMER P.O. \_\_\_\_\_  
MASON M. \_\_\_\_\_ DWG No. \_\_\_\_\_

TYPE  
**ND**  
Double Deflection  
Neoprene Mounts

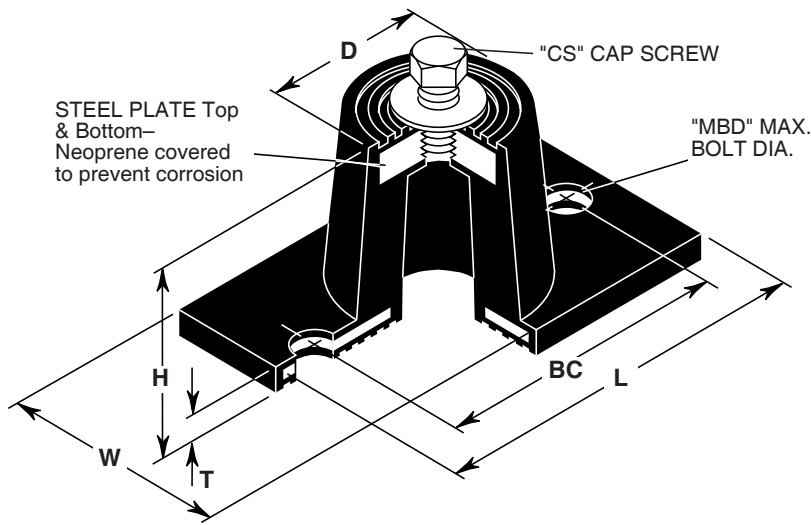

TYPE ND DIMENSIONS (mm)

Size	D	H	L	T	W	BC	CS	MBD
ND-A	30	38	81	5	41	60	5/16-18x3/4"	5/16"
ND-B	44	48	98	6	59	76	3/8-18x1"	5/16"
ND-C	65	70	140	6	84	105	1/2-13x1"	1/2"
ND-D	86	70	159	8	102	127	1/2-13x1"	1/2"
ND-E	114	70	187	6	130	156	1/2-13x1"	1/2"

TYPE ND RATINGS

Size (Color Mark)	Duro-meter	Rated Capacity Range (kg)	Max Rated Defl (mm)
ND-A-BLACK	30	7-20	9
ND-A-GREEN	40	14-34	
ND-A-RED	50	27-57	
ND-B-BLACK	30	23-45	10
ND-B-GREEN	40	34-68	
ND-B-RED	50	50-106	
ND-B-WHITE	60	82-172	
ND-B-YELLOW	70	136-272	
ND-C-GREEN	40	63-118	13
ND-C-RED	50	91-181	
ND-C-WHITE	60	140-272	
ND-C-YELLOW	70	236-453	
ND-D-YELLOW	70	480-951	13
ND-E-YELLOW	70	997-1948	13

Mounts have straight line deflection curves.

CERTIFICATION DATA

\_\_\_\_\_ mm SPECIFIED DEFLECTION

TAG \_\_\_\_\_

UNIT \_\_\_\_\_



PLAN VIEW OF MOUNT LOCATION

1	2
3	4
5	6
7	8
9	10
MATERIAL FOR ONE SET _____ SETS REQUIRED	

DWN	CHKD	DATE
-----	------	------

DWG No. \_\_\_\_\_