





MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products
 NY Mailing Address: PO Box 410, Smithtown, NY 11787
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com

CERTIFIED FOR

JOB NAME :
 CUSTOMER :
 CUSTOMER P.O. :
 MASON M.I. :
 DWG. NO. :

TYPE
RISI
 RUBBER IN
 SHEAR FLOOR
 DAMPER INSERT

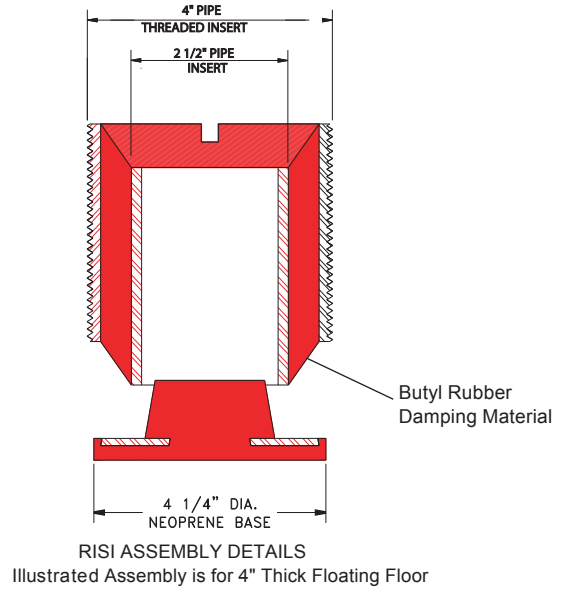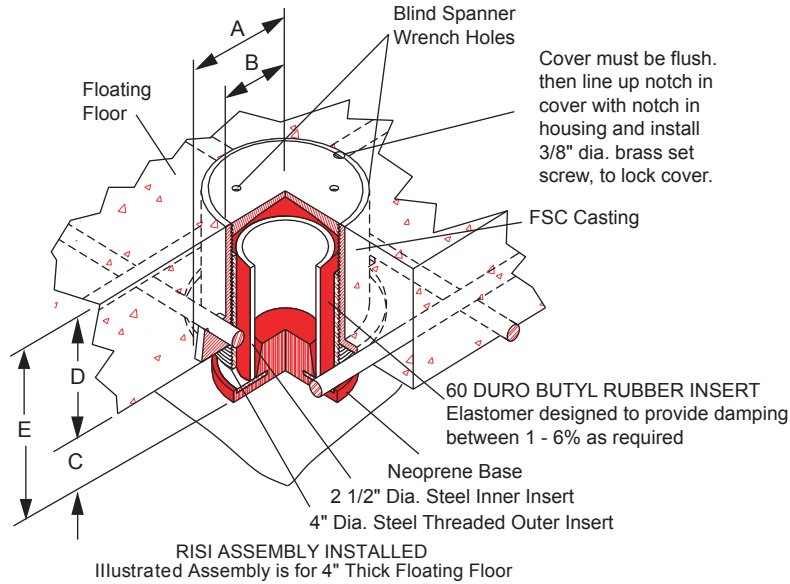

TYPE RISI DIMENSIONS

Type & Size	Housing Dimensions		Air Gap C	Floor Thickness D	Overall Height E
	A	B			
RISI-	3 1/4" (83 mm)	2 1/2" (65 mm)	Most Common 1" or 2" (25 or 50 mm) Occasionally 3" or 4" (75 or 100 mm)	Minimum 3" (75 mm)† Most Common 4" (100 mm) Occasionally 6" thru 12" (150 -300 mm)	Air Gap plus Floor Thickness

CERTIFICATION DATA

TAG : _____

DWN : _____ CHKD: _____ DATE : _____

DWG NO. : _____