



MASON INDUSTRIES, Inc.
Manufacturers of Vibration Control Products

350 Rabro Drive 2101 W. Crescent Ave., Suite D
Hauppauge, NY 11788 Anaheim, CA 92801
631/348-0282 714/535-2727
FAX 631/348-0279 FAX 714/535-5738
Info@Mason-Ind.com Info@MasonAnaheim.com
Website: www.Mason-Ind.com

CERTIFIED FOR


JOB NAME _____

CUSTOMER _____

CUSTOMER P.O. _____

MASON M. _____ DWG No. _____

SUPERFLEX
MFTNC
TWIN SPHERE
EPDM CONNECTOR
& EXPANSION JOINT

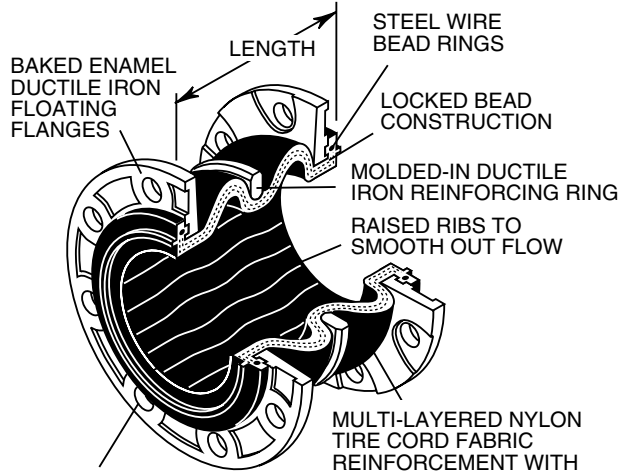


- 150 lb ASA Drilling
- 300 lb ASA Drilling
- BRITISH Series E Drilling
- BRITISH Series F Drilling
- DIN or PIN-10
- DIN or PIN-16
- DIN or PIN-25

- CR Control Rods
- ACC Control Cables

If not all Peroxide Cured EPDM, Materials are—

Cover Liner

- Neoprene
- Natural Rubber
- Hypalon
- Nitrile (Buna N)
- EPDM



Nominal 250 psi **17 Bar** Standard Superflex Connectors do not require control rods or cables in anti-vibration applications when pre-extended during installation in accordance with installation instructions.

Nominal 335 psi **23 Bar** Heavy Duty units should be installed with control rods or cables over 275 psi **19 Bar**.

SUPERFLEX MFTNC DIMENSIONS AND ALLOWABLE MOVEMENTS

Superflex MFTNC Size in mm	Length Face to Face in mm	Allowable Movements			
		Axial Compression in mm	Axial Elongation in mm	Transverse ±in ±mm	Angular degrees
1 1/2 40	7 180	1 1/2 38	1/2 13	5/8 16	30°
2 50		1 1/2 38	1/2 13	5/8 16	30°
2 1/2 65		1 1/2 38	1/2 13	7/8 22	30°
3 75		1 1/2 38	3/4 19	7/8 22	30°
4 100	7 180	1 1/2 38	3/4 19	7/8 22	29°
5 125		1 1/2 38	3/4 19	7/8 22	24°
6 150		1 1/2 38	3/4 19	7/8 22	20°
8 200	8 200	1 1/2 38	3/4 19	7/8 22	15°
10 250		1 1/2 38	7/8 22	1 1/4 32	13°
12 300		1 1/2 38	7/8 22	1 1/4 32	11°
14 350	10 250	1 1/2 38	1 25	1 1/4 32	11°

SUPERFLEX MFTNC Standard and High Pressure Construction— Pressure Reduction at Higher Temperatures

Construction & Sizes	Nominal Rating at:					Max. Vacuum (in Hg) (Minus Bar)
	170°F 77°C	190°F 88°C	210°F 99°C	230°F 110°C	250°F 121°C	
Standard 1 1/2" - 14" 40 - 350mm	250 psi 17 Bar	230 psi 16 Bar	210 psi 14 Bar	190 psi 13 Bar	170 psi 12 Bar	14" 0.5
High Pressure 1 1/2" - 14" 40 - 350mm	335 psi 23 Bar	310 psi 21 Bar	285 psi 19 Bar	260 psi 18 Bar	235 psi 16 Bar	22" 0.7

Burst pressures are a minimum of three times Operating Pressures.

Pressure Ratings—

Nominal 250 psi **17 Bar** Standard
Nominal 335 psi **23 Bar** Heavy Duty Okay for Full Vacuum

When Expansion Joints are used for piping expansion or contraction, Anchors must be provided on both sides of the expansion joint at the extreme ends of the protected run or the joints will not function properly.

CERTIFICATION DATA

QUANTITY REQUIRED	SUPERFLEX MFTNC SIZE	TAG

DWN CHKD DATE

DWG No. _____