



MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products
 NY Mailing Address: PO Box 410, Smithtown, NY 11787
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com


CERTIFIED FOR

JOB NAME :
 CUSTOMER :
 CUSTOMER P.O. :
 MASON M.I. :
 DWG. NO. :

TYPE

SLRSEBP

2" Deflection
 B, B2, C2, 2-C2 & 4-C2
 Series Spring Mounting
 w/ Extended Baseplate

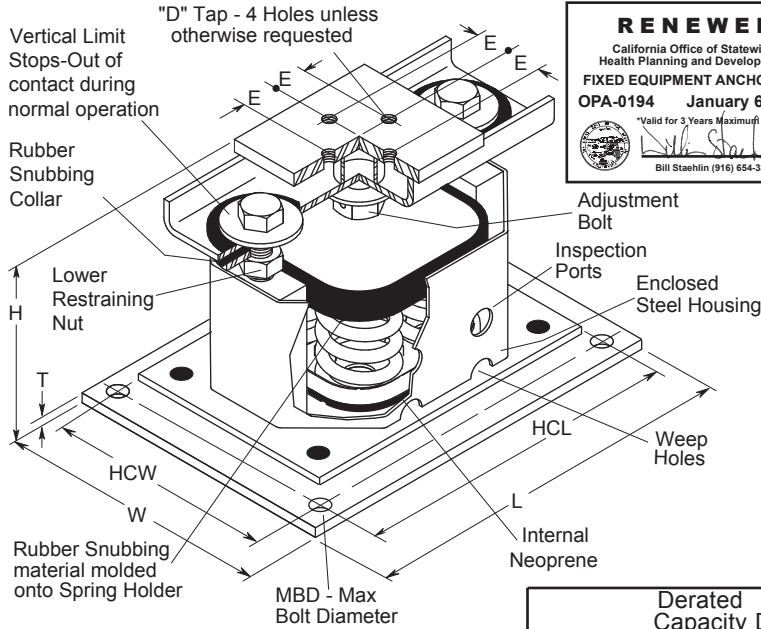

TYPE SLRSEBP RATINGS

* with RED inner spring

SLRSEBP Size	Rated Capacity (lbs)	Rated Defl. (in)	Spring Constant (lbs/in)	Spring Color	G Rating
B-20	20	2.40	8	Tan	80.0
B-26	26	21.8	12	Wht/Blue	61.5
B-35	35	2.20	16	Purple	45.7
B-50	50	2.20	24	Wht/Red	32.0
B-65	65	2.10	31	Brown	24.6
B-85	85	2.10	40	Wht/Blk	18.8
B-115	115	2.00	57	Silver	13.9
B-150	150	2.00	75	Orange	10.7
B2-210	210	2.12	99	Silver	7.6
B2-290	290	2.00	144	Blue	5.5
B2-450	450	2.00	224	Tan	3.6
B2-680	680	2.00	340	Gray	2.4
C2-125	125	2.50	50	Purple	48.0
C2-170	170	2.40	70	Brown	35.0
C2-210	210	2.30	90	Red	28.3
C2-260	260	2.20	120	White	23.0
C2-330	330	2.00	165	Black	18.0
C2-460	460	2.00	230	Blue	13.0
C2-610	610	2.00	305	Green	9.8
C2-880**	880	2.00	440	Gray	6.8
C2-1210**	1210	2.00	605	Silver	4.9
C2-1540**	1540	2.00	770	Gray*	3.9
C2-1870**	1870	2.00	935	Silver*	3.2
2-C2-340	340	2.40	140	Brown	15.3
2-C2-420	420	2.30	180	Red	12.4
2-C2-520	520	2.20	240	White	10.0
2-C2-660	660	2.00	330	Black	7.9
2-C2-920	920	2.00	460	Blue	5.7
2-C2-1220	1220	2.00	610	Green	4.3
2-C2-1760**	1760	2.00	880	Gray	3.0
2-C2-2420**	2420	2.00	1210	Silver	2.2
2-C2-3080**	3080	2.00	1540	Gray*	1.7
2-C2-3740**	3740	2.00	1870	Silver*	1.4
4-C2-4840**	4840	2.00	2420	Silver	2.3
4-C2-6160**	6160	2.00	3080	Gray*	1.8
4-C2-7480**	7480	2.00	3740	Silver*	1.5

**Published ratings allow minimum 25% additional travel to solid. For a full 50% specified minimum use the following ratings shown to the left. All springs without "*" have additional travel to solid equal to 50% of the rated deflection.

Illustration above shows a SLRSEBP-4-C2 (4 springs). SLRSEBP-B have 1 spring, SLRS-B2, C2 & 2-C2 has 2 springs and multiple spring mounts have C size springs.

Solid Spring Height = Free Height minus 1.5 times the Rated Deflection.

Size	Derated Capacity [lbs]	Defl. [in]
B2-450	410	1.67
B2-680	565	1.67
C2-880	800	1.67
C2-1210	1010	1.67
C2-1540	1285	1.67
C2-1870	1560	1.67
2-C2-1760	1600	1.67
2-C2-2420	2020	1.67
2-C2-3080	2570	1.67
2-C2-3740	3120	1.67
4-C2-4840	4040	1.67
4-C2-6160	5145	1.67
4-C2-7480	6245	1.67

TYPE SLRSEBP DIMENSIONS (inches)

Size	L	W	H	T	MBD	HCW	HCL	D	E
SLRSEBP-B	10	9	8 5/8	1/4	3/4	7 1/4	8	1/2	1 1/8
SLRSEBP-B2 & C2	10	9	8 5/8	1/4	3/4	7 1/4	8	5/8	1 3/8
SLRSEBP-2-C2	14	11	8 3/4	3/8	7/8	9	12	5/8	1 3/8
SLRSEBP-4-C2	17	14	8 3/4	3/8	1 1/8	12	15	7/8	1 3/8

SPRING DATA

Size	Spring OD	Free Height	Ratio K _x /K _y	Ratio OD/OH
B	2 3/8	4	0.70-0.90	0.80-1.25
1-4	2 7/8	4 1/8	0.90-1.10	0.92

CERTIFICATION

TAG : _____

UNIT : _____

PLAN VIEW OF MOUNT LOCATION :



inch SPECIFIED DEFLECTION

1 :	6 :
2 :	7 :
3 :	8 :
4 :	9 :
5 :	10 :
Material for One Set : _____ Sets Required	

DWN : _____ CHKD : _____ DATE : _____

DWG NO. : _____