



MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products
 NY Mailing Address: PO Box 410, Smithtown, NY 11787
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com


CERTIFIED FOR

JOB NAME :
 CUSTOMER :
 CUSTOMER P.O. :
 MASON M.I. :
 DWG. NO. :


TYPE
**Super
 W**
 Waffle Pad

MATERIAL:

- Natural Rubber
- Standard Neoprene
- AASHTO Bridge Bearing Neoprene

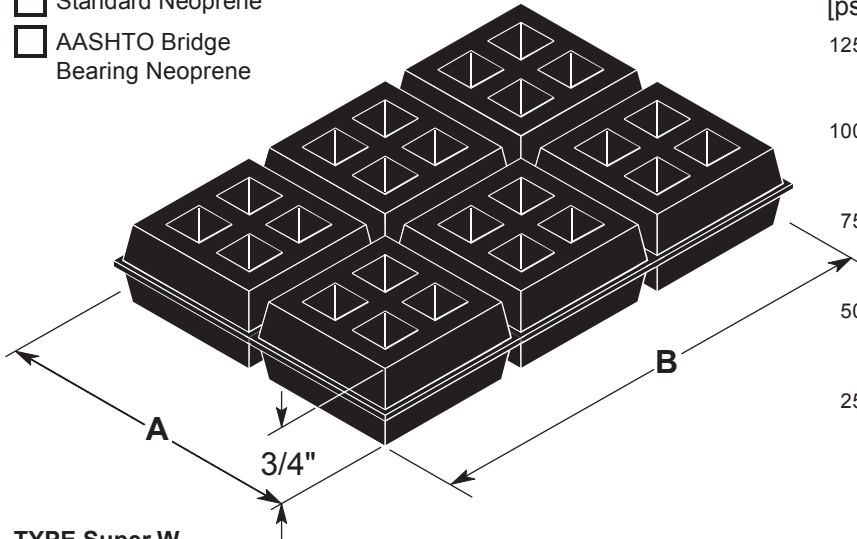

Load Deflection Curves

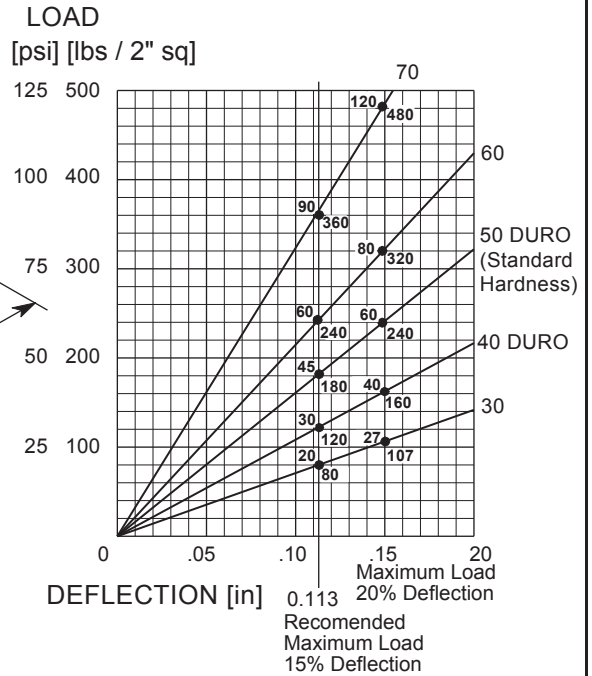

**TYPE Super W
 LOAD RATINGS per SQUARE**

Durometer	Recommended Load per 2x2" sq.		Recommended Load per Area		Maximum Load per Area	
	[lbs]	[kg]	[lbs/in ²]	[kg/mm ²]	[lbs/in ²]	[kg/mm ²]
30	80	35	20	.014	27	.019
40	120	55	30	.021	40	.028
Standard 50	180	80	45	.032	60	.042
60	240	110	60	.042	80	.056
70	360	165	90	.063	120	.084

FULL SIZED SHEETS


are 18 x 18 x 3/4" (450 x 450 x 19mm) consisting of 81 - 2" (50mm) square modules.
 Actual pad sizes are as scheduled below.

CERTIFICATION DATA

TAG : _____

UNIT : _____

PLAN VIEW OF PAD LOCATION :



1 :	6 :
2 :	7 :
3 :	8 :
4 :	9 :
5 :	10 :
Material for One Set :	
Sets Required	

Type Super W Dimensions [inches][mm]

A	B

Durometer of Pad Material to be: _____ DURO

DWN : _____ CHKD: _____ DATE : _____

DWG NO. : _____