MASON INDUSTRIES, Inc.
Manufacturers of Vibration Control Products

350 Rabro Drive
Hauppauge, NY 11788
631/348-0282
FAX 631/348-0279
Info@Mason-Ind.com
www.Mason-Ind.com

2101 W. Crescent Ave., Suite D
Anaheim, CA 92801
714/535-2727
FAX 714/535-5738
Info@MasonAnaheim.com
www.MasonAnaheim.com

CERTIFIED FOR

JOB NAME _____

CUSTOMER _____

CUSTOMER P.O. _____

MASON M. _____ **DWG No.** _____

TYPE

BBF

BRAIDED BRONZE CONNECTIONS

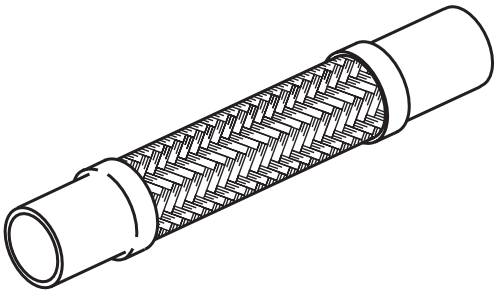

Type & Size	To Fit Over Copper Tubing: Nominal Size (in)	Actual Size (in)	Overall Length (±1/4 in)	Oper. Pressure @ 70°F: Freon Service *5/1 Safety Factor	Water Service 3/1 Safety Factor
BBF-1	1/8	1/4	7 1/2	700	1175
BBF-2	1/4	3/8	8 1/4	700	1175
BBF-3	3/8	1/2	9	580	970
BBF-4	1/2	5/8	9 3/4	500	835
BBF-5	5/8	3/4	10	500	835
BBF-6	3/4	7/8	11 1/2	360	600
BBF-7	1	1 1/8	13	300	500
BBF-8	1 1/4	1 3/8	14 3/4	300	500
BBF-9	1 1/2	1 5/8	17	235	400
BBF-10	2	2 1/8	20	150	250
BBF-11	2 1/2	2 5/8	24	235	400
BBF-12	3	3 1/8	27	235	400
BBF-13	3 1/2	3 5/8	32 5/8	150	250
BBF-14	4	4 1/8	33 3/8	150	250
BBF-15	5	5 1/8	41	150	250
BBF-16	6	6 1/8	48	150	250

*Underwriters Lab Approved

Two hoses at right angles accept motion in all modes.



Braided hoses accept transverse motion only.



Single hoses should be installed parallel to the equipment shaft.



CERTIFICATION DATA

No. of Pieces	BBF Size	TAG

DWN	CHKD	DATE

DWG No.